

# Centro EC

Inline centrifugal fans with EC motor

## Use

- Supply and extraction ventilation and air conditioning systems of various premises requiring cost saving controllable ventilation.
- Supply and extraction ventilation of offices, bathrooms, toilets, laundries, kitchens, ensuites in apartments, hotels, homes and commercial buildings.
- Compatible with Ø 150 up to 315 mm round air ducts.



**Air flow:**  
up to 1500 m<sup>3</sup>/h  
417 l/s



**Power:**  
from 82 W



**Noise level:**  
from 29 dBA



## Design

- Durable, impact resistant and corrosion free ABS-plastic casing.
- Aerodynamically shaped casing.
- Airtight terminal box for connection to power mains.

## Motor

- High efficient direct current EC motor with external rotor and backward curved blades.
- EC technology meets the up to date requirements to energy saving and controllable ventilation and provides up to 35 % energy saving as compared to asynchronous motors.
- EC motors ensure totally controllable speed range for the fan and has integrated overheating protection with automatic restart.
- EC motors have no friction and wearing parts as capacitor und brushes. Instead a maintenance free EC controller electronic circuit board is used.
- The impeller is dynamically balanced.
- The fan is compatible with 50 Hz and 60 Hz power mains and the maximum speed does not depend on power mains frequency.
- All motors have a sealed ball bearing motor with a service life of up to 40 000 hours, are 2 speed with an exterior two speed switch and can be fitted with a speed controller.
- All motors have manual reset thermal overload protection as required for inline duct fans AS/NZS60335-2-80:2004.

## Wiring

- Comes with a 1.2 m lead, 2 pin plug.

## Speed Control

- The fan speed is controlled with a 0–10 V control signal from the following sources:
  - integrated or external speed controller
  - controller with sensors
  - central BMS system.
- The control signal value changes depending on air temperature, pressure, smoke concentration and other parameters.
- During signal value change the fan with EC motor correspondingly changes the rotations speed and delivers required air volume to the ventilation system.
- The computer central building management systems (BMS) enable integration of several EC motors in network and precise individual operation control for each fan.

## Mounting

- The fans are designed for duct mounting in any point of the ventilation system with the casing mounted at any angle. In case of vertical mounting a protective outer hood must be installed on the top.
- Fixation to the floor wall or ceiling is performed with the supplied mounting brackets.
- Electric connection and installation must be performed in compliance with the manual and the wiring diagram on the terminal box.



Mounting bracket for easy installation  
supplied with the fan

## Designation key

Series	Motor	Spigot diameter [mm]
Centro	EC: electronically commutated motor	150; 200; 250; 315

## Accessories


Filter box	Speed controller	Grilles and cowls	Ducting	Low profile ducting	Backdraft damper	Fire damper

## Ordering Information

Part Number	Model	Description
BLACENTROEC150	Centro EC 150	INLINE FAN CENTRIFUGAL 150 mm EC MOTOR
BLACENTROEC200	Centro EC 200	INLINE FAN CENTRIFUGAL 200 mm EC MOTOR
BLACENTROEC250	Centro EC 250	INLINE FAN CENTRIFUGAL 250 mm EC MOTOR
BLACENTROEC315	Centro EC 315	INLINE FAN CENTRIFUGAL 315 mm EC MOTOR

## Overall Dimensions [mm]

Model	$\varnothing D$	$\varnothing D1$	B	L	L1	L2	L3	Weight [kg]
Centro EC 150	150/160	300	310	286	30	30	30	2.5
Centro EC 200	200	340	354	276	30	30	40	3
Centro EC 250	250	340	354	265	30	30	40	4.3
Centro EC 315	315	400	414	276	40	55	40	4.9

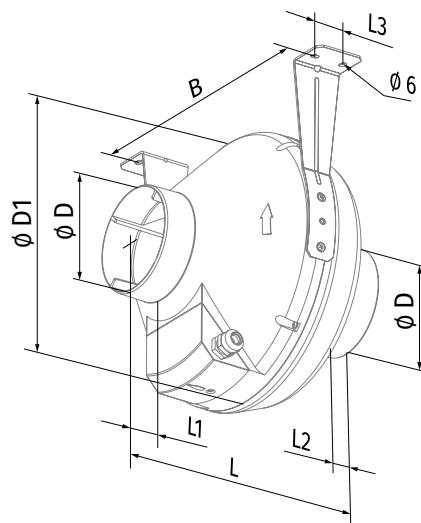


## Technical Data

Parameters	Centro EC 150	Centro EC 200	Centro EC 250	Centro EC 315
Voltage [V]	1 ~ 230	1 ~ 230	1 ~ 230	1 ~ 230
Frequency [Hz]	50	50	50	50
Power [W]	82	84	165	165
Current [A]	0.63	0.64	1.1	1.15
Maximum air flow [m³/h (l/s)]	630 (175)	885 (246)	1250 (347)	1500 (417)
RPM [min⁻¹]	3400	2700	2600	2500
Sound pressure level at 3 m [dBA]	30-72	29-67	32-69	32-69
Transported air temperature [°C]	-25...+60	-25...+60	-25...+60	-25...+60
SEC class	B	B	-	-
IP rating	IPX4	IPX4	IPX4	IPX4
Motor IP rating	IP44	IP44	IP44	IP44
ErP	2018	2018	2018	2018

### CENTRO EC 150

Sound power level, A-weighted	Total	Octave frequency bands [Hz]									LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000			
L <sub>WA</sub> to inlet [dBA]	93	55	90	89	77	76	73	70	56	72	82	
L <sub>WA</sub> to outlet [dBA]	93	55	91	88	74	73	68	67	54	72	82	
L <sub>WA</sub> to environment [dBA]	66	26	48	58	61	60	59	51	39	45	55	


Point	Power [W]	Point	Power [W]
1	82	11	31
2	82	12	27
3	82	13	17
4	82	14	17
5	54	15	17
6	57	16	16
7	53	17	9
8	49	18	9
9	32	19	8
10	33	20	8

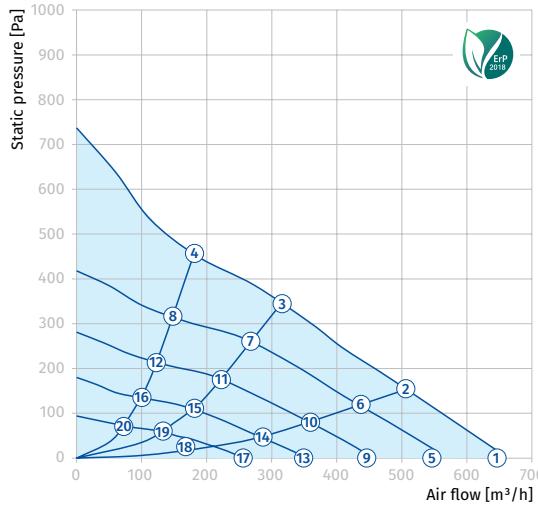

### CENTRO EC 200

Sound power level, A-weighted	Total	Octave frequency bands [Hz]									LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000			
L <sub>WA</sub> to inlet [dBA]	87	48	76	84	79	79	80	72	61	67	77	
L <sub>WA</sub> to outlet [dBA]	85	45	75	79	77	77	80	72	62	64	74	
L <sub>WA</sub> to environment [dBA]	67	27	49	60	62	61	60	52	39	47	57	


Point	Power [W]	Point	Power [W]
1	84	11	32
2	84	12	31
3	83	13	16
4	82	14	18
5	51	15	18
6	54	16	17
7	58	17	8
8	55	18	8
9	28	19	9
10	32	20	8

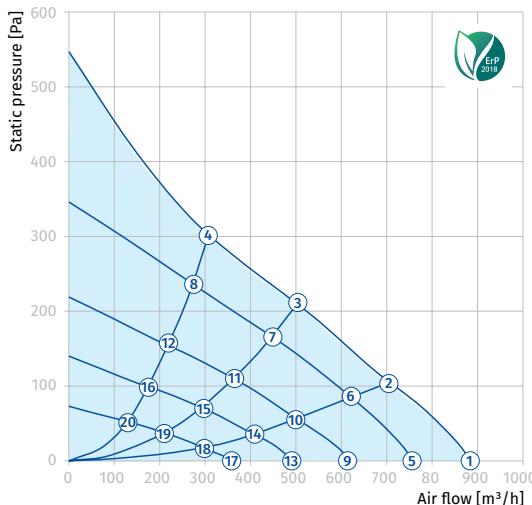

**CENTRO EC 250**

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
L <sub>WA</sub> to inlet [dBA]	89	60	77	84	82	84	80	76	64	69	79
L <sub>WA</sub> to outlet [dBA]	87	63	76	72	81	83	81	76	62	67	77
L <sub>WA</sub> to environment [dBA]	68	30	49	58	62	65	61	52	38	48	58

Point	Power [W]	Point	Power [W]
1	152	11	89
2	161	12	78
3	165	13	37
4	154	14	40
5	121	15	43
6	131	16	38
7	140	17	16
8	125	18	17
9	76	19	18
10	83	20	16

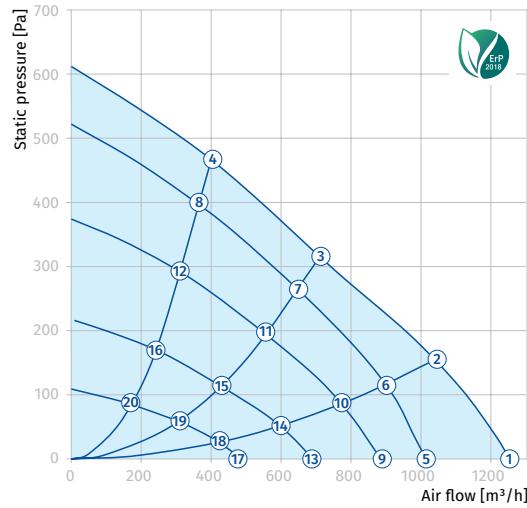**CENTRO EC 315**

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
L <sub>WA</sub> to inlet [dBA]	86	51	73	71	75	81	82	77	68	66	76
L <sub>WA</sub> to outlet [dBA]	87	55	66	76	73	81	84	77	69	67	77
L <sub>WA</sub> to environment [dBA]	69	30	48	56	62	64	64	56	49	48	58

Point	Power [W]	Point	Power [W]
1	149	11	90
2	164	12	84
3	165	13	37
4	158	14	39
5	94	15	45
6	106	16	41
7	112	17	17
8	104	18	19
9	74	19	19
10	83	20	17

