

Iso-Mix EC

Sound insulated inline mixed flow fans with EC motor

Use

- Combined supply and exhaust ventilation systems of various commercial and industrial spaces with stringent noise requirements (such as libraries, conference halls, school classrooms, offices).
- For ventilation air ducts requiring high pressure, powerful air flow and low noise level.
- Compatible with Ø 150 up to Ø 315 mm air ducts.



Air flow:
up to 1970 m³/h
547 l/s



Power:
from 55 W



Noise level:
from 20 dBA



Features

- The new series of **Iso-Mix EC** duct fan series is provided with a special sound insulated casing which ensures silent operation and excellent aerodynamic characteristics.
- Iso-Mix EC** fans combine the versatility and outstanding performance of both axial and centrifugal fans producing a powerful air flow and high pressure while retaining the signature energy efficiency and response of EC motors.
- Several fans can be integrated into a single computer controlled system with sensor feedback combined with speed control across the entire dynamic range.

- EC motor has no friction and wearing parts as capacitor and brushes. Instead a maintenance free EC controller electronic circuit board is used.
- The impeller is dynamically balanced.
- The fan is compatible with 50 Hz and 60 Hz power mains and the maximum speed does not depend on power mains frequency.
- All motors have a sealed ball bearing motor with a service life of up to 40 000 hours, are 2 speed with an exterior two speed switch and can be fitted with a speed controller.
- All motors have manual reset thermal overload protection as required for inline duct fans AS/NZS60335-2-80:2004.

Design

- The external casing is made of steel with a polymer coating.
- The internal casing perforations conduct sound waves and direct them at the noise absorbing material at a specific angle. Noise and heat insulation is ensured by a mineral wool layer 50 mm in thickness. Wideband noise control is achieved by means of special casing perforation and the use of noise absorbing material.
- The inner casing and the impeller are made of durable high quality plastic.
- Conical impellers with specially profiled blades help boost angular velocity of the air flow resulting in higher pressure and air capacity compared to the conventional designs. The combination of a diffuser, a specially designed impeller and flow straightener vanes at the fan outlet allow, for an optimum flow distribution to achieve high capacity and increased air pressure without generating excessive noise.
- The fan casing is equipped with an external water tight terminal box for electrical connections.

Speed Control

- The fan speed is controlled with a 0–10 V control signal from the following sources:
 - integrated or external speed controller
 - controller with sensors
 - central BMS system.
- The control signal value changes depending on air temperature, pressure, smoke concentration and other parameters.
- During signal value change the fan with EC motor correspondingly changes the rotations speed and delivers required air volume to the ventilation system.
- The computer central building management systems (BMS) enable integration of several EC motors in network and precise individual operation control for each fan.

Motor

- High efficient direct current EC motor.
- EC technology meets the up to date requirements to energy saving and controllable ventilation and provides up to 35 % energy saving as compared to asynchronous motors.
- EC motors ensure totally controllable speed range for the fan and has integrated overheating protection with automatic restart.

Mounting

- The fans are designed to be used with round air ducts.
- The fan casing has mounting brackets for convenient installation onto the floor, walls or ceiling. The ducts can be fitted at any angle relative to the fan axis.
- Make sure to provide sufficient maintenance access during fan installation. Electrical connection and installation must be performed in accordance with the instruction manual and the electrical connections diagram applied to the terminal box.
- A single system may have several fans installed in parallel to boost the output capacity or in series to boost the working pressure.

Designation key

Series	Motor type	Spigot diameter [mm]
Iso-Mix	EC: electronically commutated motor	150; 200; 250; 315

Accessories


Filter box	Speed controller	Grilles and cowls	Ducting	Low profile ducting	Backdraft damper	Fire damper

Ordering Information


Part Number	Model	Description
BLATURBOEC150MIX	Iso-Mix EC 150	MIXFLO 150 mm FAN EC MOTOR - SILENT SERIES
BLATURBOEC200MIX	Iso-Mix EC 200	MIXFLO 200 mm FAN EC MOTOR - SILENT SERIES
BLATURBOEC250MIX	Iso-Mix EC 250	MIXFLO 250 mm FAN EC MOTOR - SILENT SERIES
BLATURBOEC315MIX	Iso-Mix EC 315	MIXFLO 315 mm FAN EC MOTOR - SILENT SERIES

Overall dimensions [mm]

Type	Ø D	B	B1	H	L
Iso-Mix EC 150	147	273	314	264	579
Iso-Mix EC 200	198	343	393	296	558
Iso-Mix EC 250	248	402	452	363	664
Iso-Mix EC 315	313	478	528	455	785

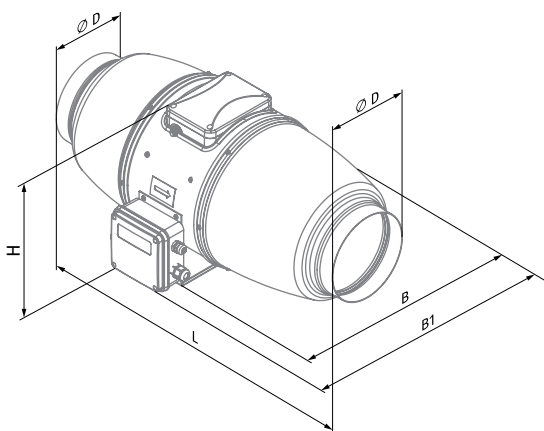

Iso-Mix EC 150, Iso-Mix EC 315

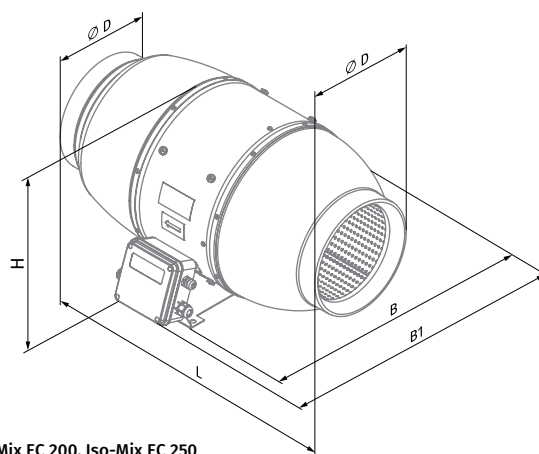

Iso-Mix EC 200, Iso-Mix EC 250

Technical Data



Parameters	Iso-Mix EC 150	Iso-Mix EC 200	Iso-Mix EC 250	Iso-Mix EC 315
Voltage [V / 50 Hz]	1 ~ 230	1 ~ 230	1 ~ 230	1 ~ 230
Power [W]	55	123	169	284
Current [A]	0.48	1.02	1.38	1.25
Maximum air flow [m ³ /h (l/s)]	600 (167)	1040 (289)	1285 (357)	1970 (547)
RPM [min ⁻¹]	3390	3390	2870	2826
Sound pressure at 3 m [dBA]	20-41	22-48	24-50	26-52
Transported air temperature [°C]	-25...+55	-25...+55	-25...+55	-25...+55
IP rating	IPX4	IPX4	IPX4	IPX4
Motor IP rating	B	-	-	-
ErP	2018	2018	2018	2018

ISO-MIX EC 150(160)

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	61	45	58	58	41	37	33	30	23	41	51
LWA to outlet [dBA]	58	47	58	46	43	39	32	27	20	38	48
LWA to environment [dBA]	58	48	48	50	57	45	43	36	30	38	48

ISO-MIX EC 200

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	68	37	47	57	63	63	62	61	55	48	58
LWA to outlet [dBA]	70	42	50	59	64	66	64	63	58	50	60
LWA to environment [dBA]	63	31	43	53	61	56	53	47	37	43	52

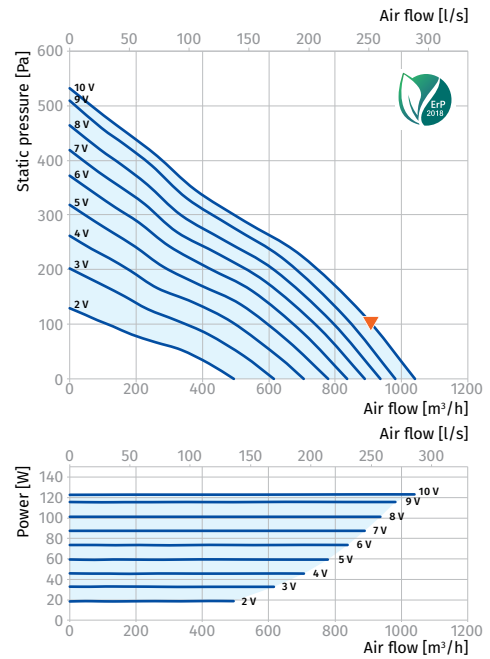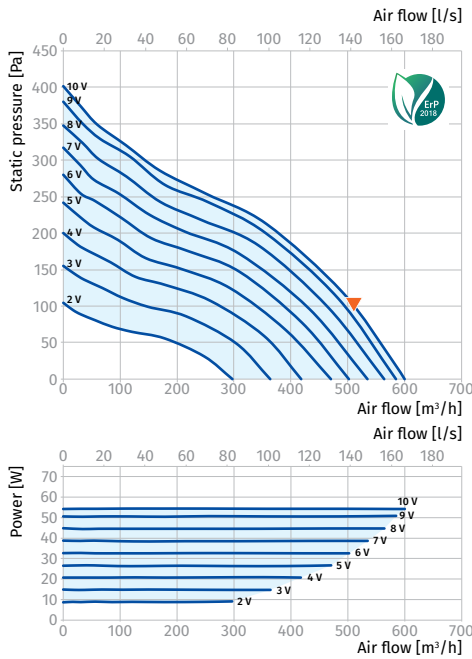

ISO-MIX EC 250

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	70	45	48	60	66	65	63	58	52	50	60
LWA to outlet [dBA]	74	46	54	62	70	69	66	63	56	54	64
LWA to environment [dBA]	63	40	45	52	60	57	51	43	31	42	52

ISO-MIX EC 315

Sound power level, A-weighted	Total	Octave frequency bands [Hz]								LpA 3 m	LpA 1 m
		63	125	250	500	1000	2000	4000	8000		
LWA to inlet [dBA]	72	41	55	64	65	70	65	63	55	52	62
LWA to outlet [dBA]	77	52	61	67	74	71	69	67	62	57	66
LWA to environment [dBA]	66	33	48	58	60	63	57	50	38	46	55

