

KOMFORT Ultra EC L2 300

Compact heat recovery air handling units

Features

- Air handling units for efficient supply and exhaust ventilation in flats, houses, cottages and other buildings.
- The heat recovery technology is used to minimize ventilation heat losses.
- Control of air exchange for creating comfortable indoor microclimate.
- Compatible with round \varnothing 125 mm air ducts.



Air flow:
up to 300 m³/h
83 l/s



Heat recovery efficiency:
up to 73 %




Design

- The casing of **KOMFORT Ultra EC L2 300-E S14 white** is made of double skinned white painted metal panels, internally filled with 20 mm mineral wool layer for heat- and sound insulation.
- The spigots are located at the sides of the unit and are equipped with rubber seals for airtight connection to the air ducts.
- The hinged panel of the casing ensures easy access to the unit internals for service works including cleaning, filter replacement, etc.

Fans

- The unit is equipped with high efficient external rotor EC motors and centrifugal impellers with forward curved blades.
- EC motors have the best power consumption to air flow ratio and meet the latest demands concerning energy saving and high efficient ventilation.
- EC motors are featured with high performance, low noise level and totally controllable speed range.
- The impellers are dynamically balanced.

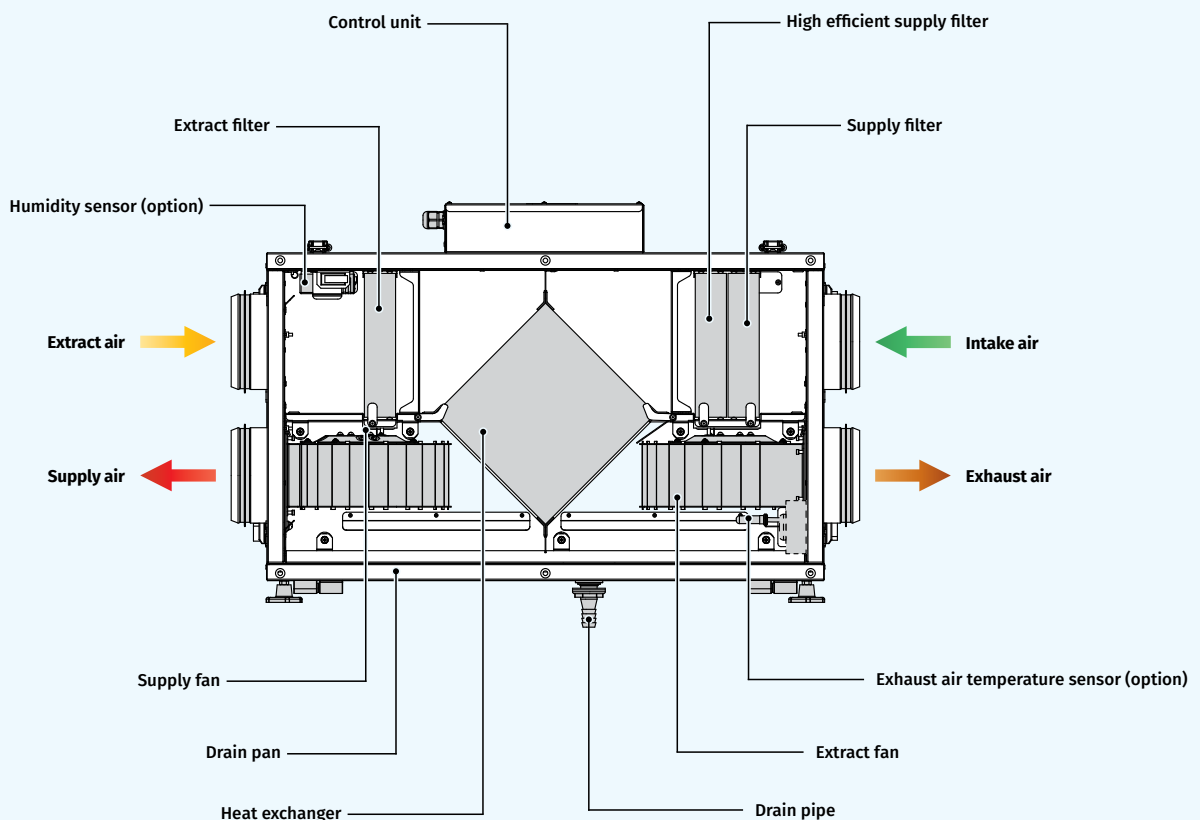

Heat Recovery

- The **KOMFORT Ultra EC L2 300-E ... white** unit is equipped with an enthalpy plate cross-flow heat exchanger for energy (heat and humidity) recovery. Due to humidity recovery condensate is not generated in the enthalpy heat exchanger.



- The air flows are completely separated in the heat exchanger. Thus smells and contaminants are not transferred from the extract air to the supply air.
- Heat recovery is based on heat and/or humidity transfer through the heat exchanger plates. In the cold season supply air is heated in the heat exchanger by transferring the heat energy of warm and humid extract air to the cold fresh air. Heat recovery minimizes ventilation heat losses and heating costs respectively.
- In the warm season the heat exchanger performs reverse and intake air is cooled in the heat exchanger by the cool extract air. That reduces operation load on air conditioners and saves electricity.
- When the indoor and outdoor temperature difference is insignificant, heat recovery is not reasonable. In this case the heat exchanger can be temporarily replaced with a summer block for the warm season (available as a specially ordered accessory).

FREEZE PROTECTION

- The integrated automatic freeze protection is used to prevent freezing of the heat exchanger in the cold season. The supply fan turns off according to the temperature sensor to get the heat exchanger warmed up with extract air. After that the supply fan turns on and the unit continues to run in the standard mode.

Air Filtration

- Two built-in G4 and F8 filters provide efficient supply air filtration.
- The G4 filter is used for extract air filtration.

Control and Automation

- The **KOMFORT Ultra EC L2 300-E S14 white** units have an integrated control system with a wall mounted control panel S14 with a LED indication.



The S14 control panel functions:

- Unit On/Off.
- Speed selection: Low, Medium or High.
- Activation of the summer ventilation mode: The supply fan stops and the extract fan continues its operation with no heat recovery.
- Alarm indication.
- Filter maintenance indication.


The KOMFORT Ultra EC L2 300-E S14 white unit is equipped with a USB connector (Type B) and can be connected to a PC for configuring the advanced settings in a special software:

- Fan speed adjustment from 0 to 100 %. Each speed is individually adjusted for the supply and the extract fans
- Operation control on feedback from the FS2 duct humidity sensor (to be ordered separately)
- Unit operation setting according to the external control unit (to be ordered separately)
- Temperature setting for freeze protection system activation
- Control and operation adjustment of the filter maintenance timer
- External relay status and humidity level control
- Software version upgrading

Designation key								
Series	Unit type	Motor type	Spigot modification	Insulation	Rated air flow [m³/h]	Heat exchanger type	Control	Casing
KOMFORT	Ultra: compact unit	EC: electronically commutated motor	L: horizontal spigot orientation	2: Insulation 20 mm	300	- E: energy recovery	S14: sensor control panel with LED indication	white: painted steel

Overall Dimensions [mm]

Model	D	B	H	H1	L	L1
KOMFORT Ultra EC L2 300-E S14 white	125	300	443	63	713	810

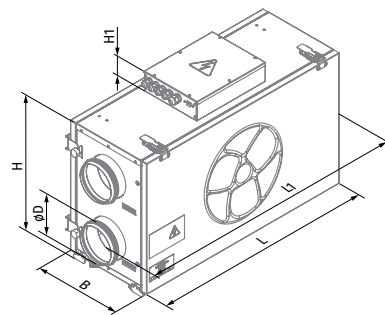

KOMFORT Ultra EC L2 300-E S14 white

Ordering Information

Part Number	Model	Description
BLAKOMFORTULTRAEC2300-ES14	KOMFORT Ultra EC L2 300-E S14 white	EC MOTORS WALL/FLOOR MOUNTED COMPACT ENERGY AHU

Technical Data

Parameters	KOMFORT Ultra EC L2 300-E S14 white
Voltage [V / 50 (60) Hz]	1 ~ 230
Power [W]	165
Current [A]	1.3
Maximum air flow [m ³ /h (l/s)]	300 (83)
RPM [min ⁻¹]	2050
Sound pressure level at 3 m [dBA]	33
Transported air temperature [°C]	-25...+40
Insulation	20 mm mineral wool
Extract filter	G4
Supply filter	G4, F8
Connected air duct diameter [mm]	125
Weight [kg]	28
Heat recovery efficiency [%]*	51-73
Humidity recovery efficiency [%]	26-45
Heat exchanger type	cross-flow
Heat exchanger material	enthalpy
SEC class for S2 automation	C
SEC class for S14 automation	A
ErP	2016, 2018



* Heat recovery efficiency is specified in compliance with the EN 13141-7.

Sound power level, A-weighted	Total	Octave frequency band [Hz]								LpA 3 m [dBA]	LpA 1 m [dBA]
		63	125	250	500	1000	2000	4000	8000		
L _{WA} to supply inlet [dBA]	56	48	43	53	44	44	40	26	24		
L _{WA} to supply outlet [dBA]	71	53	53	68	65	60	59	52	51		
L _{WA} to exhaust inlet [dBA]	57	43	51	52	52	45	37	26	21		
L _{WA} to exhaust outlet [dBA]	72	53	60	66	67	61	62	55	48		
L _{WA} to environment [dBA]	53	33	44	47	50	44	38	29	24	33	43







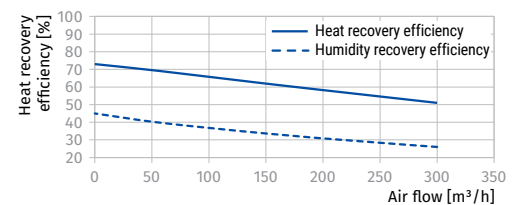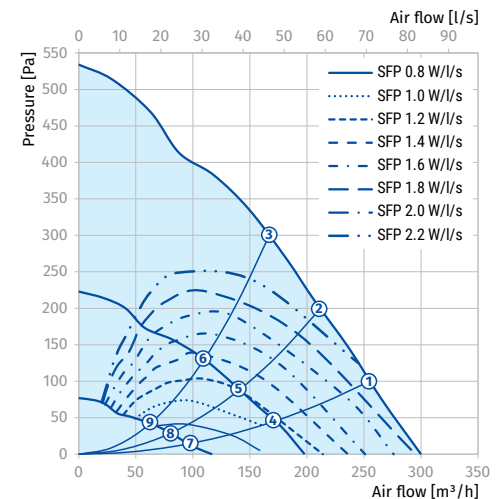





Data provided for point 1 of the air flow diagram

Total power. Total sound pressure level.

Point	Total power of the unit [W]	Sound pressure level at 3 m (1 m) [dBA]
1	150	33 (43)
2	138	33 (43)
3	121	32 (42)
4	52	31 (41)
5	48	28 (38)
6	41	27 (37)
7	17	27 (37)
8	16	23 (33)
9	14	23 (33)



Accessories

		KOMFORT Ultra EC L2 300-E S14 white
G4 panel filter		FP 240x184x40 G4
F8 panel filter		FP 240x184x40 F8
Internal humidity sensor		FS2
CO ₂ sensor with indication		CD-1
CO ₂ sensor		CD-2
Humidity sensor		HR-S
Silencer		SD 125
Silencer		SDF 125
Backdraft air damper		VRV 125
Air damper		VKA 125
Electric actuator		LF230
Summer block		SB C4 200/240