







## Centro 250

Inline centrifugal fans

- Maximum airflow: 1080
- Sound pressure level LpA at 3 m: 70
- Motor type: AC
- Impeller type: Centrifugal backward curved blades
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position
- Cable with mains plug

|  | Unit of measurement | Centro 250 |
|--|---------------------|------------|
| Connected air duct size                | mm                  | 250        |
| Speed                                  | -                   | 1          |
| Phases                                 | -                   | 1          |
| Minimum supply voltage                 | V                   | 230        |
| Maximum supply voltage                 | V                   | 230        |
| Power supply frequency                 | Hz                  | 50/60      |
| Rated power                            | W                   | 173        |
| Unit current                           | A                   | 0.76       |
| Maximum airflow                        | m <sup>3</sup> /h   | 1080       |
| rotation speed at 50hz                 | -                   | 2090       |
| Sound pressure level LpA at 3 m        | dB(A)               | 70         |
| Weight                                 | kg                  | 4.3        |
| Transported air temperature (max)      | °C                  | 50         |
| Transported air temperature (min)      | °C                  | -25        |
| Ambient air temperature min            | °C                  | 1          |
| Ambient air temperature max            | °C                  | 45         |
| Ingress protection rating              | -                   | IPX4       |
| Ingress protection rating of the drive | -                   | IP44       |

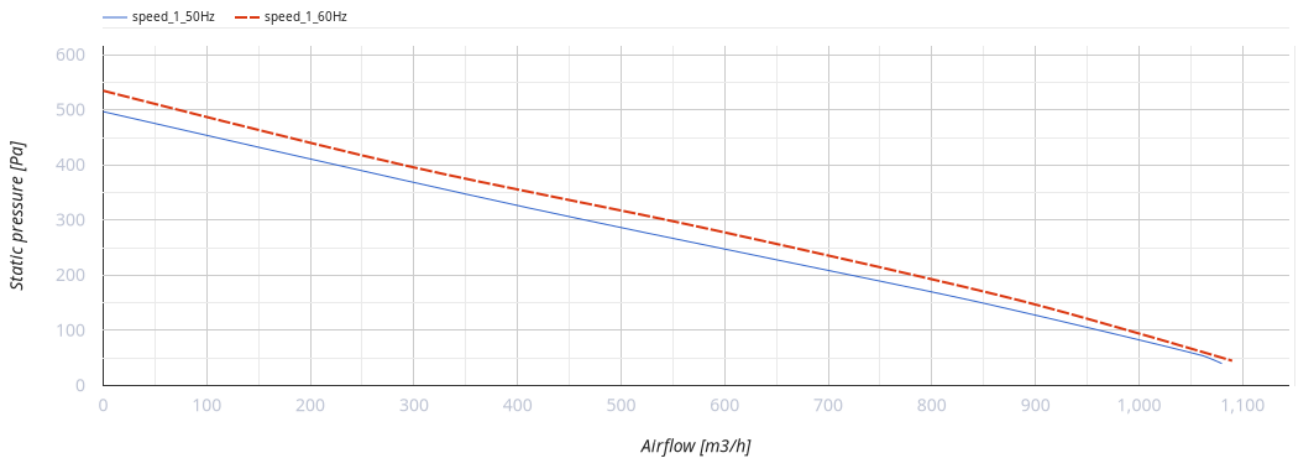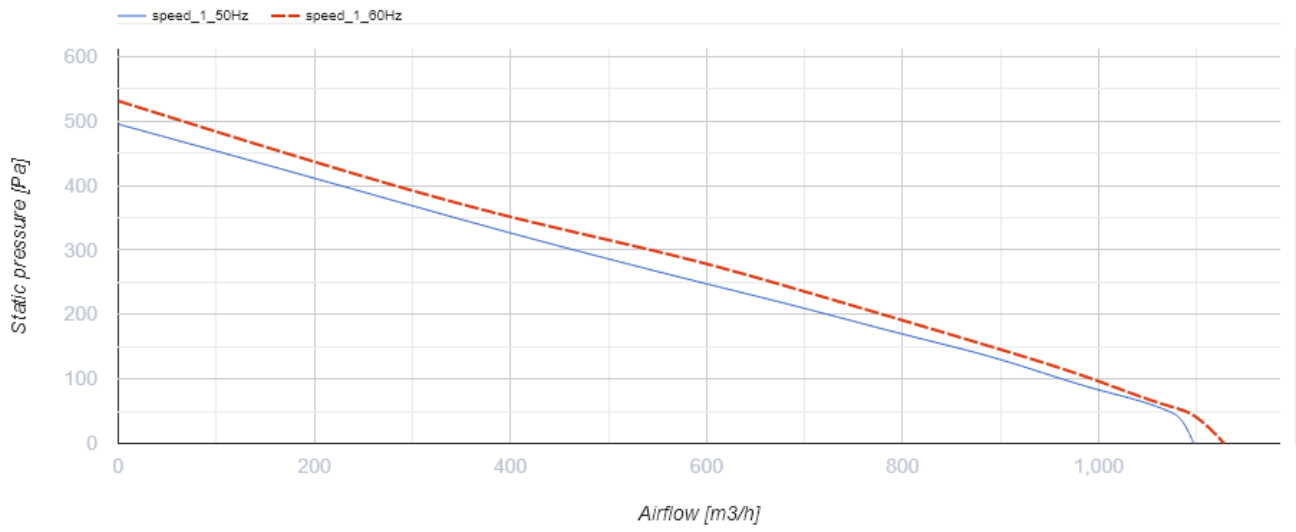

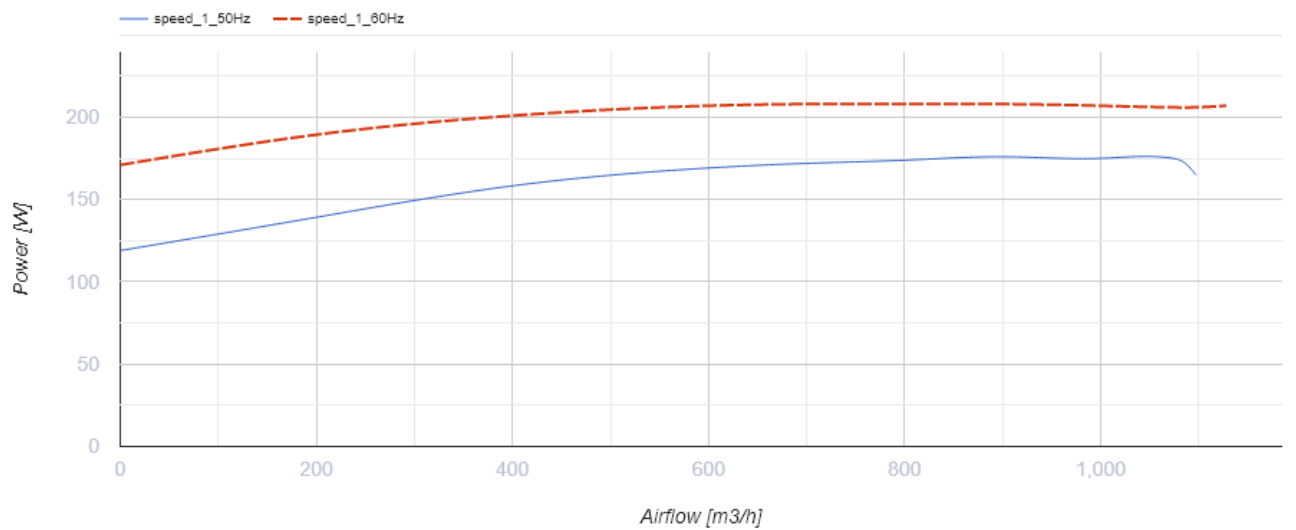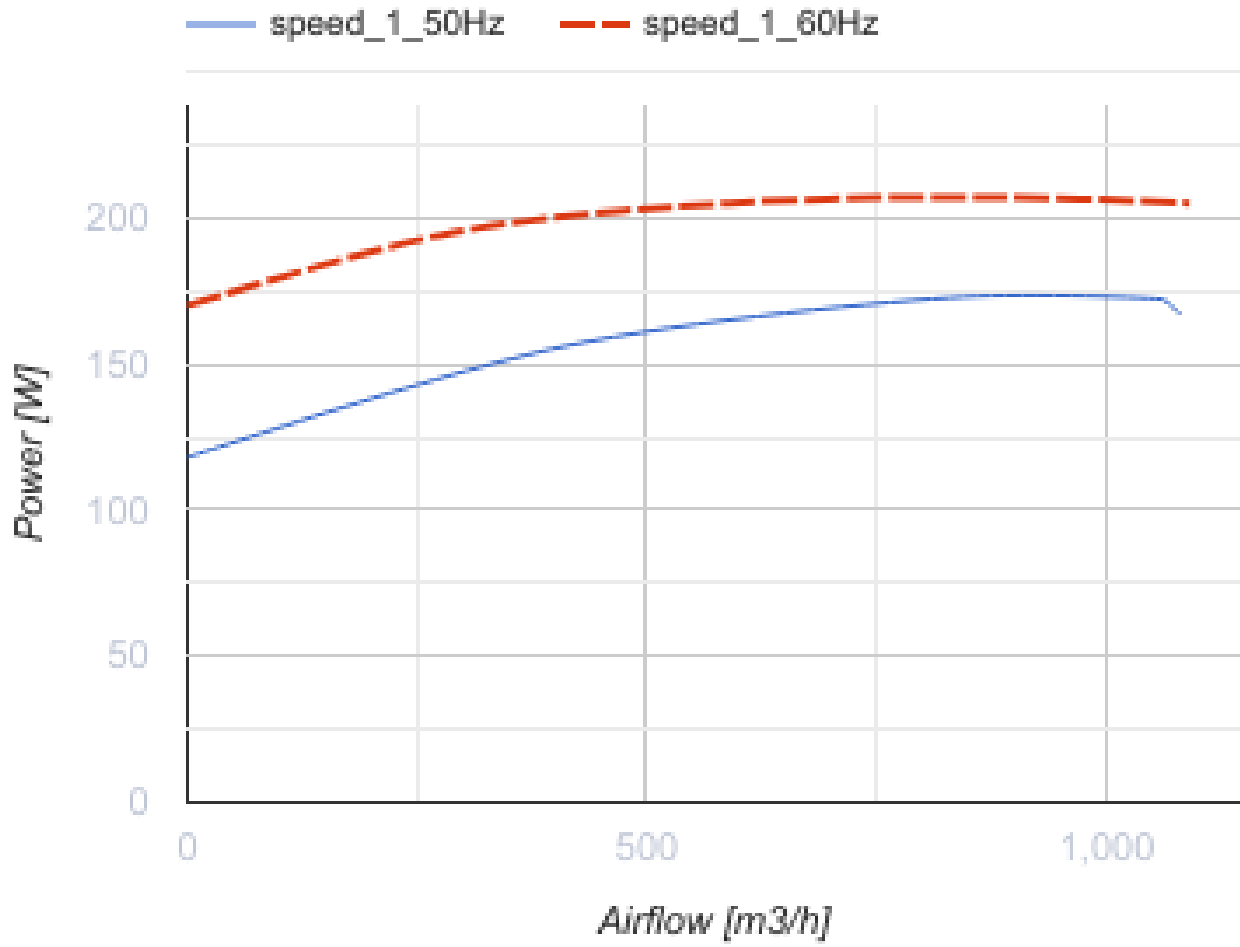

## Dimensions

| ØD  | ØD1 | B   | L   | L1 | L2 | L3 |
|-----|-----|-----|-----|----|----|----|
| 250 | 340 | 354 | 265 | 30 | 30 | 40 |

