




Freshbox E2-100 ERV WiFi

Single-room air handling units

- Power of electrical preheater: 700
- Power of electrical reheater: 350
- Maximum airflow: 100
- Sound pressure level LpA at 3 m: 39
- Heat recovery efficiency: 96
- Heat exchanger type: Counter flow
- Extract filter: G4
- Supply filter: G4
- Sound insulation
- Motor type: EC
- Enthalpy heat exchanger
- Reheater: Built-in
- Preheater: Built-in
- Control: Smartphone
- Casing material: Coated steel
- Temperature sensor: Built-in

	Unit of measurement	Freshbox E2-100 ERV WiFi				
Connected air duct size	mm	100				
Speed	-	5				
Phases	-	1				
Minimum supply voltage	V	230				
Maximum supply voltage	V	230				
Power supply frequency	Hz	50/60				
Rated power	W	20	23	29	37	53
Power of electrical preheater	W	700				
Power of electrical reheater	W	350				
Unit current	A	0.4				
Maximum airflow	m ³ /h	30	44	60	75	100
rotation speed at 50hz	-					
Sound pressure level LpA at 3 m	dB(A)	13	20	27	33	39
Heat recovery efficiency	%	96	94	89	85	83
Heat exchanger type	-	Counter flow				
Heat exchanger material	-	Enthalpy				
Weight	kg	31				
Extract filter	-	G4				
Supply filter	-	G4				
Transported air temperature (max)	°C	40				

Transported air temperature (min)	°C	-20
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ambient air humidity max	%	70
Ingress protection rating	-	IP22
Ingress protection rating of the drive	-	IP44

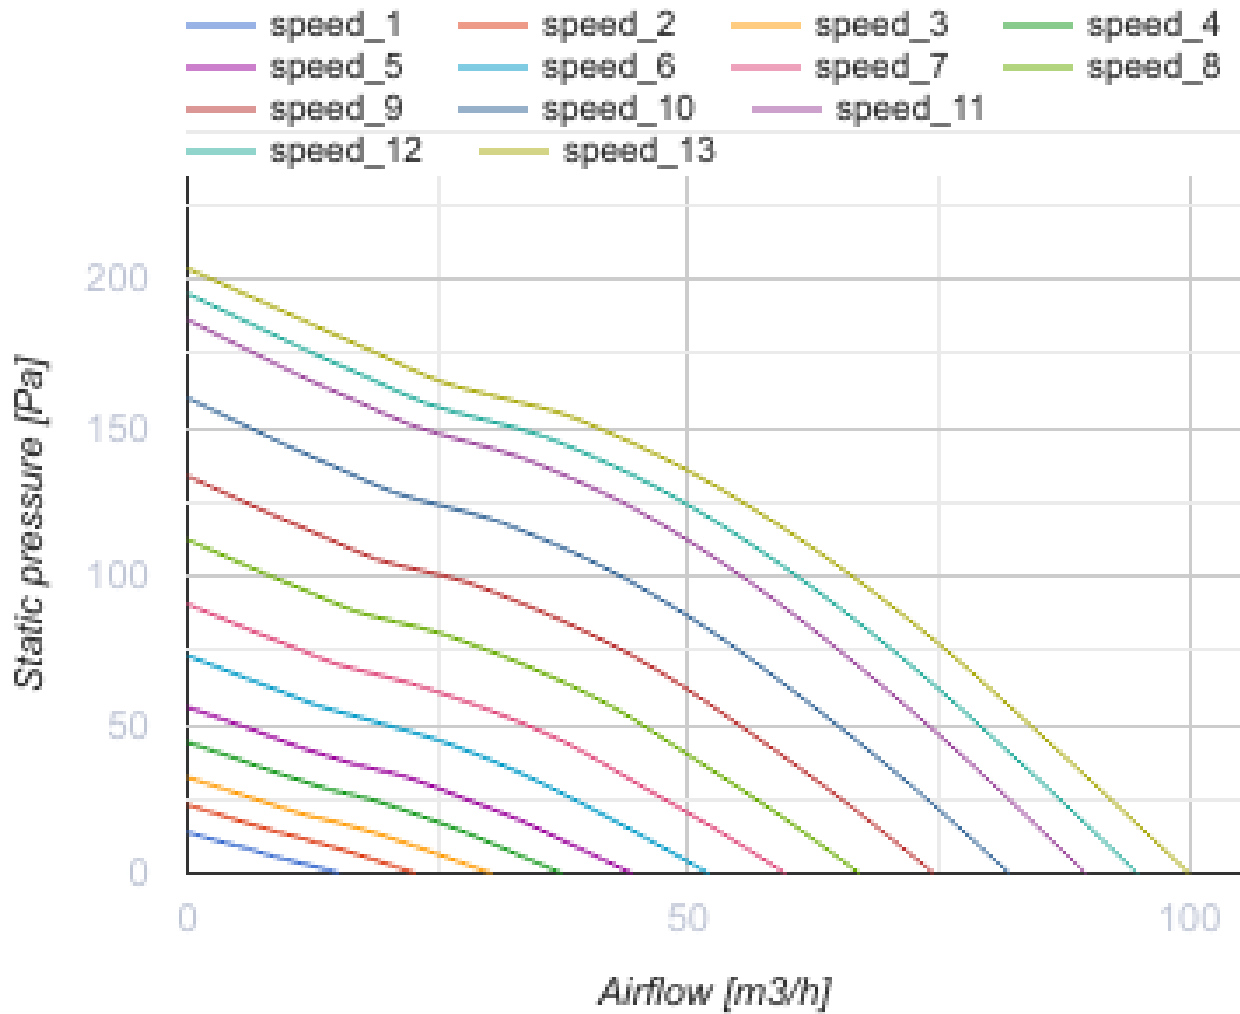

Dimensions

