

KOMFORT ERV EC DB250 S14

Suspended heat and energy recovery air handling units




- Maximum airflow: 300
- Sound pressure level LpA at 3 m: 36
- Heat exchanger type: Cross flow
- Extract filter: G4
- Supply filter: G4 + F8 (PM2.5 > 83 %)
- Sound insulation
- Motor type: EC
- Enthalpy heat exchanger
- Bypass: Manual
- Control: Wired control panel
- Casing material: Coated steel
- Humidity sensor: Optional
- CO2 sensor: Optional

	Unit of measurement	KOMFORT ERV EC DB250 S14
Connected air duct size	mm	150
Speed	-	1
Phases	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50/60
Rated power	W	84
Unit current	A	0.7
Maximum airflow	m ³ /h	300
Sound pressure level LpA at 3 m	dB(A)	36
Heat recovery efficiency, max	%	73
Heat exchanger type	-	Cross flow
Heat exchanger material	-	Enthalpy
Weight	kg	29
Extract filter	-	G4
Supply filter	-	G4 + F8 (PM2.5 > 83 %)
Transported air temperature (max)	°C	40
Transported air temperature (min)	°C	-25
Ambient air temperature min	°C	1
Ambient air temperature max	°C	40
Ambient air humidity max	%	80


Ingress protection rating	-	IP22
Ingress protection rating of the drive	-	IP44

Dimensions

D	B	H	L	L1
149	704	227	947	854

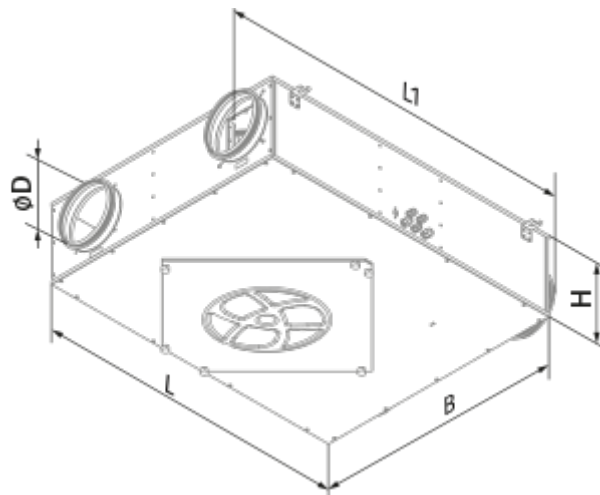

Ecodesign

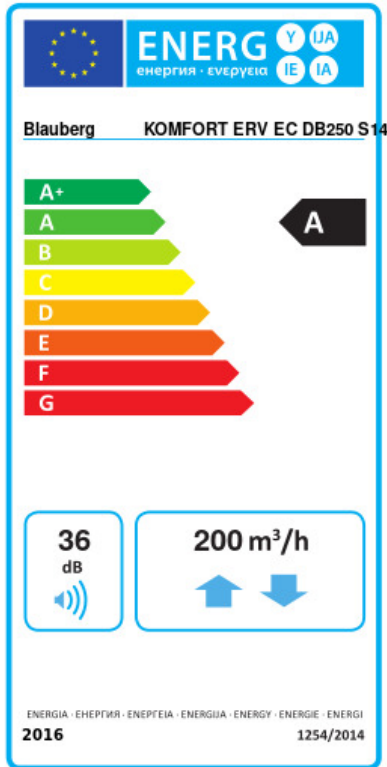

Trademark	Blauberg			
Model	KOMFORT ERV EC DB250 S14			
Specific energy consumption (SEC) (kWh/(m ² /a))	Cold	Average	Warm	
	73.5	A+	38	A 15 E
Type of ventilation unit	Bidirectional			
Type of drive installed	Variable speed			
Type of heat recovery system	Recuperative			
Thermal efficiency of heat recovery (%)	70			
Maximum flow rate (m ³ /h)	200			
Electric power input (W)	76			
Reference flow rate (m ³ /s)	0.036			
Reference pressure difference (Pa)	50			
Specific power input (SPI) (W/(m ³ /h))	0.331			
Control typology	Local demand control			
Maximum internal leakage rates (%)	2.7			
Maximum external leakage rates (%)	2.7			
Sound power level (dB(A))	36			
Declared typology	RVU BVU			
The annual electricity consumption (AEC) (kWh/a)	Cold	Average	Warm	
	757	220	175	
The annual heating saved (AHS) (kWh/a)	Cold	Average	Warm	
	8371	4279	1935	