





# Primo 400

Inline mixed flow fans

- Maximum airflow: 3350
- Sound pressure level LpA at 3 m: 51
- Motor type: AC
- Control: Speed controller
- Impeller type: Mixed-flow
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position

	Unit of measurement	Primo 400		
Connected air duct size	mm	400		
Speed	-	3		
Phases	-	1		
Minimum supply voltage	V	230		
Maximum supply voltage	V	230		
Power supply frequency	Hz	50		
Rated power	W	197	204	224
Unit current	A	0.91	0.90	0.98
Maximum airflow	m <sup>3</sup> /h	2677	3136	3350
rotation speed at 50hz	-	1320	1390	1446
Sound pressure level LpA at 3 m	dB(A)	48	49	51
Weight	kg	18.5		
Transported air temperature (max)	°C	55		
Transported air temperature (min)	°C	-25		
Ingress protection rating	-	IPX4		
Ingress protection rating of the drive	-	IP20		

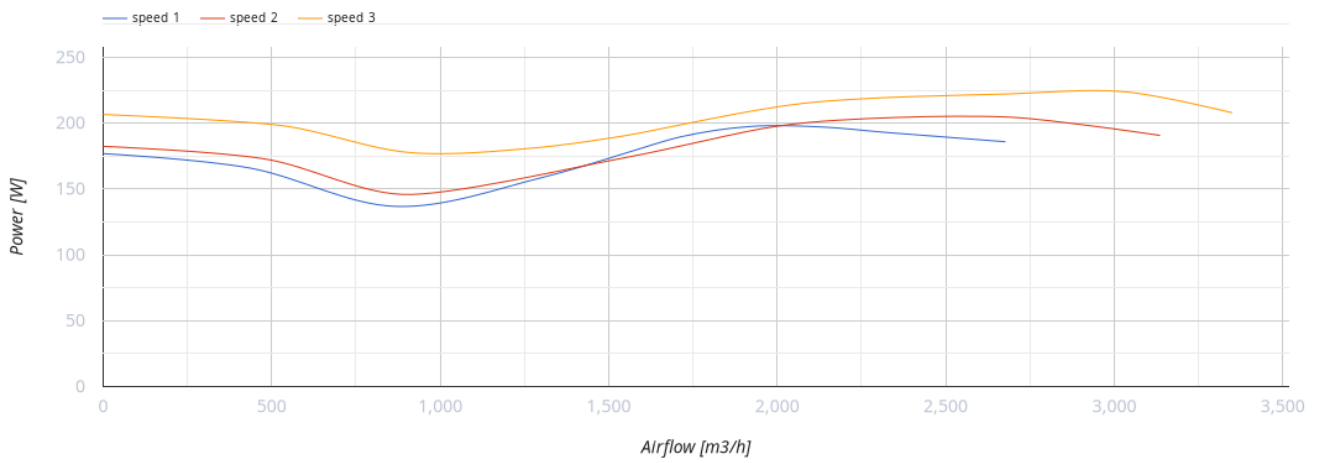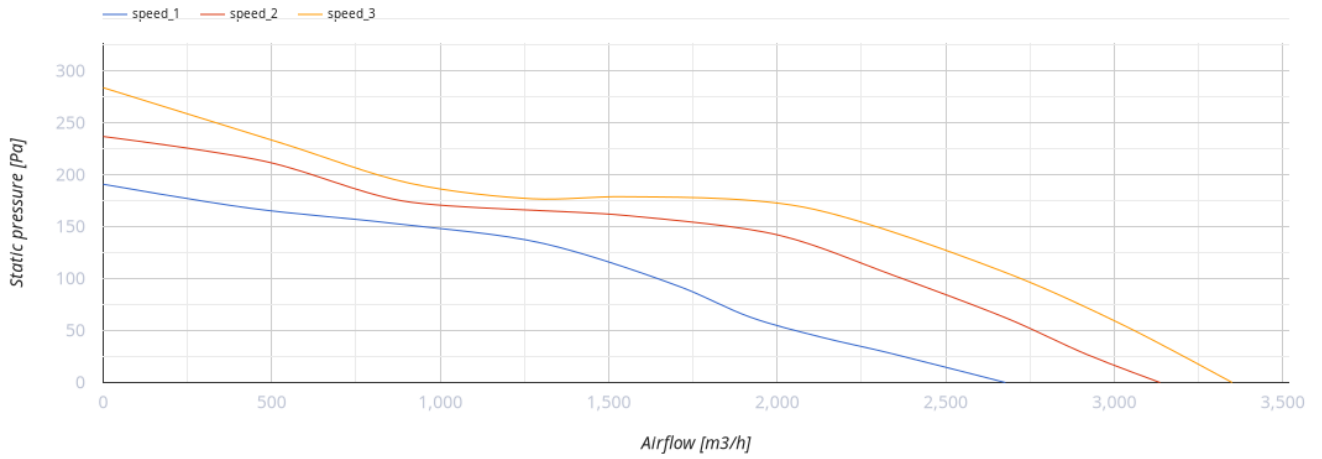

## Dimensions

ØD	ØD1	B	L
395	441	500	388

