





## Primo EC 400

Inline mixed flow fans with EC motors

- Maximum airflow: 5700
- Sound pressure level LpA at 3 m: 33-66
- Motor type: EC
- Impeller type: Mixed-flow
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position

	Unit of measurement	Primo EC 400
Connected air duct size	mm	400
Speed	-	1
Phases	-	1
Minimum supply voltage	V	230
Maximum supply voltage	V	230
Power supply frequency	Hz	50
Rated power	W	726
Unit current	A	3.23
Maximum airflow	m <sup>3</sup> /h	5700
rotation speed at 50hz	-	2580
Sound pressure level LpA at 3 m	dB(A)	33-66
Transported air temperature (max)	°C	55
Transported air temperature (min)	°C	-25
Ingress protection rating	-	IPX4
Ingress protection rating of the drive	-	IP44

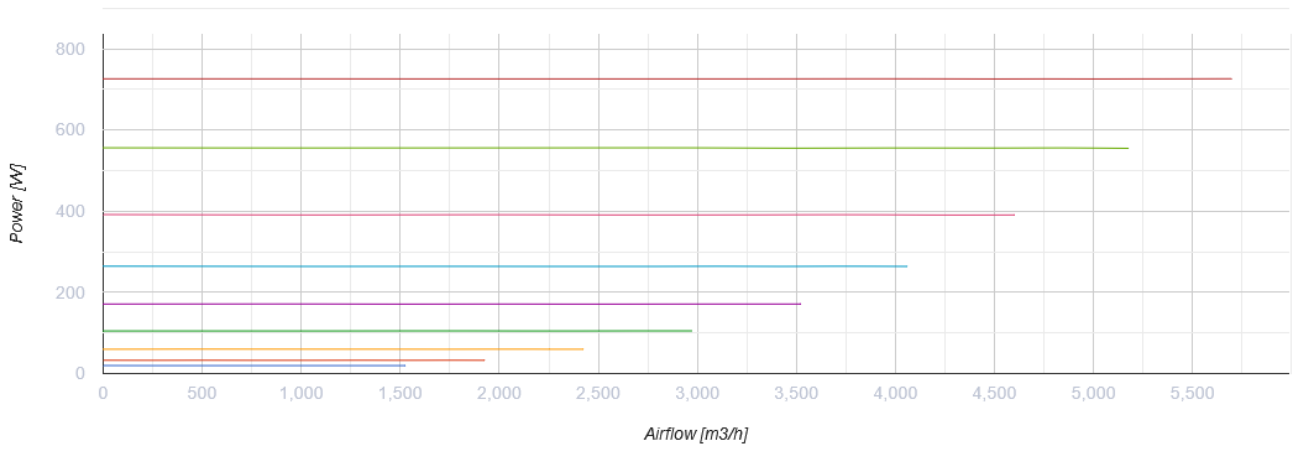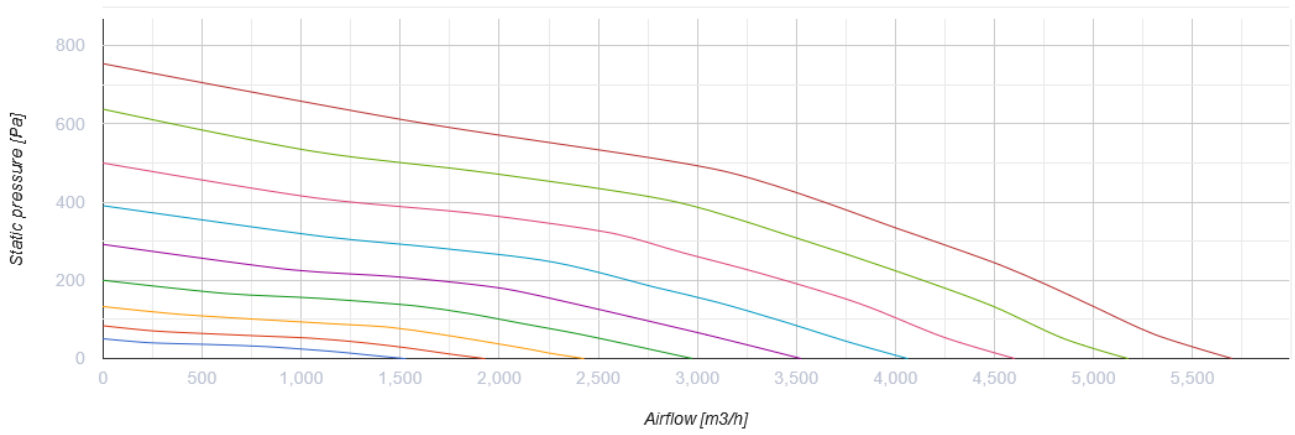

## Dimensions

ØD	ØD1	B	L
395	441	500	388

