



## Quatro 150


Exhaust fans with decorative front panel

- Maximum airflow: 265
- Sound pressure level LpA at 3 m: 37
- Motor type: AC
- Casing material: Polypropylene/Thermoplastic elastomer
- Backdraft protection: Backdraft damper


	Unit of measurement	Quatro 150
Connected air duct size	mm	150
Speed	-	1
Minimum supply voltage	V	220
Maximum supply voltage	V	240
Power supply frequency	Hz	50
Rated power	W	24
Unit current	A	0.13
Maximum airflow	m <sup>3</sup> /h	265
rotation speed at 50hz	-	
Sound pressure level LpA at 3 m	dB(A)	37
Weight	kg	0
Ambient air temperature min	°C	0
Ambient air temperature max	°C	0
Ingress protection rating	-	IP34

### Dimensions

a	a1	b	c	∅ d	e
236	207	165	157	150	38

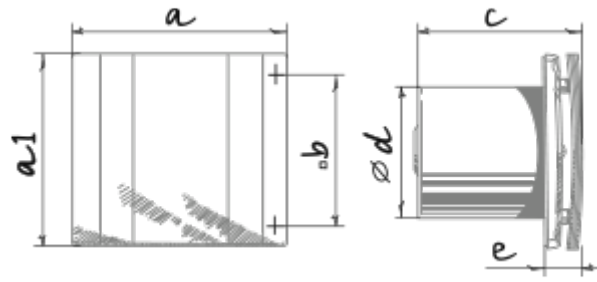

## Ecodesign

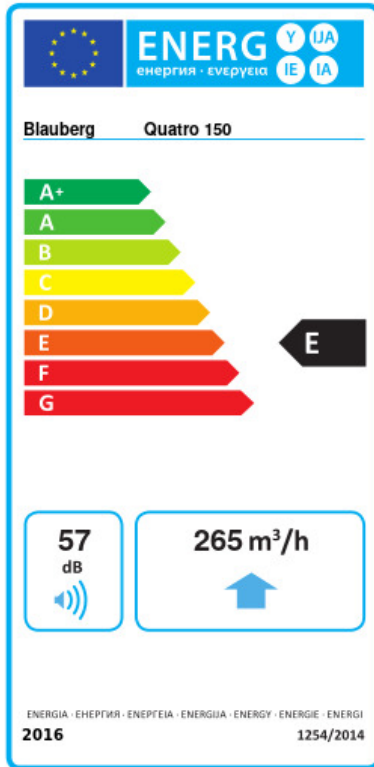

Trademark	Blauberg			
Model	Quatro 150			
Specific energy consumption (SEC) (kWh/(m²/a))	Cold	Average	Warm	
	-32 B	-15 E	-6	F
Type of ventilation unit	Unidirectional			
Type of drive installed	Multi-speed			
Type of heat recovery system	None			
Maximum flow rate (m³/h)	265			
Electric power input (W)	24			
Reference flow rate (m³/s)	0.052			
Specific power input (SPI) (W/(m³/h))	0.058			
Control typology	Manual control			
Maximum external leakage rates (%)	2.7			
Sound power level (dB(A))	57			
Declared typology	RVU UVU			
The annual electricity consumption (AEC) (kWh/a)	Cold	Average	Warm	
	100	100	100	
The annual heating saved (AHS) (kWh/a)	Cold	Average	Warm	
	3400	1700	800	