



Turbo 250 G

Inline mixed flow fans



- Maximum airflow: 1400
- Sound pressure level LpA at 3 m: 51
- Motor type: AC
- Control: Speed controller
- Impeller type: Mixed-flow
- Casing material: Polypropylene/Thermoplastic elastomer
- Installation in any position
- Cable with mains plug
- Temperature sensor

| | Unit of measurement | Turbo 250 G | |
|--|---------------------|-------------|------|
| Connected air duct size | mm | 250 | |
| Speed | - | 2 | |
| Phases | - | 1 | |
| Minimum supply voltage | V | 230 | |
| Maximum supply voltage | V | 230 | |
| Power supply frequency | Hz | 50/60 | |
| Rated power | W | 125 | 177 |
| Unit current | A | 0.54 | 0.79 |
| Maximum airflow | m ³ /h | 1110 | 1400 |
| rotation speed at 50hz | - | | |
| Sound pressure level LpA at 3 m | dB(A) | 44 | 51 |
| Weight | kg | 7.8 | |
| Transported air temperature (max) | °C | 60 | |
| Ambient air temperature min | °C | 0 | |
| Ambient air temperature max | °C | 0 | |
| Ingress protection rating | - | IPX4 | |
| Ingress protection rating of the drive | - | IPX4 | |

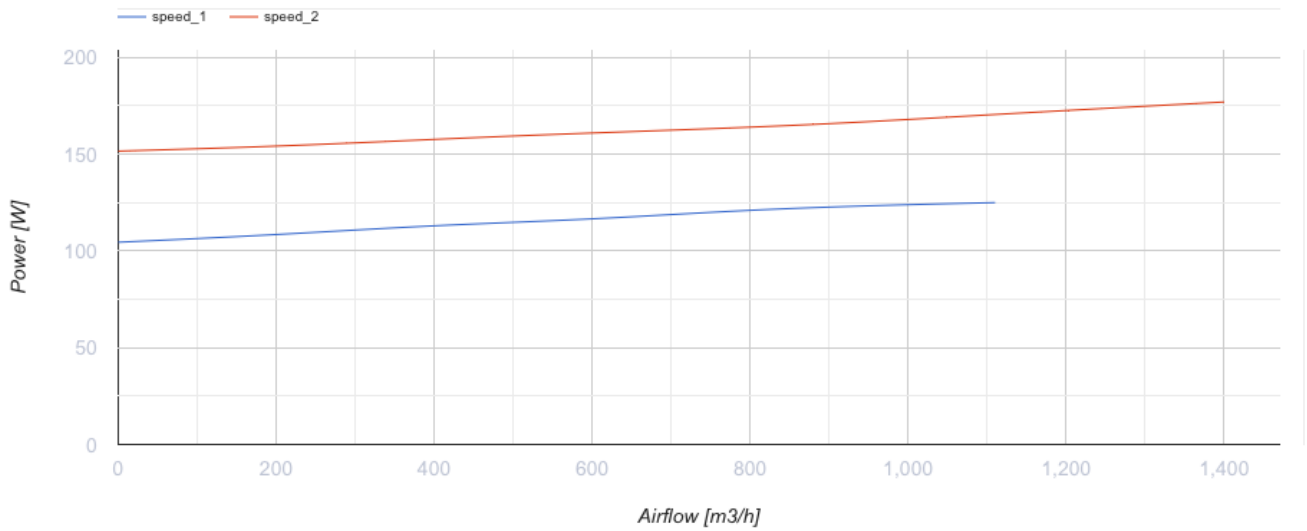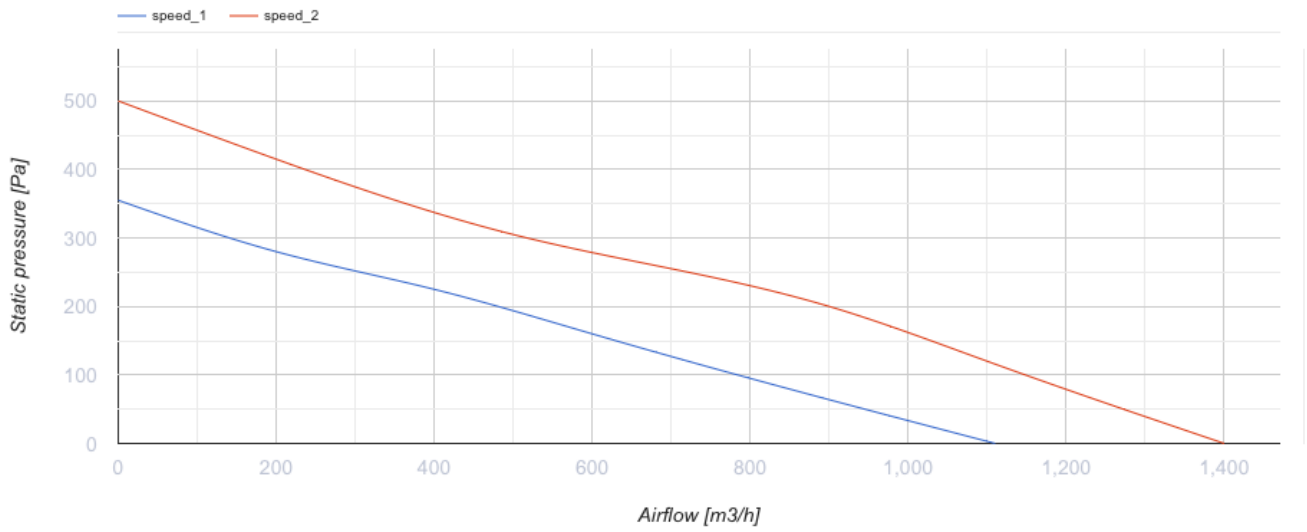

Dimensions

| ØD | ØD1 | B | H | L |
|-----|-----|-----|-----|-----|
| 247 | 257 | 287 | 323 | 383 |

